


Technical Data



BELT DRESSING ADHESIVE BELT LUBRICANT

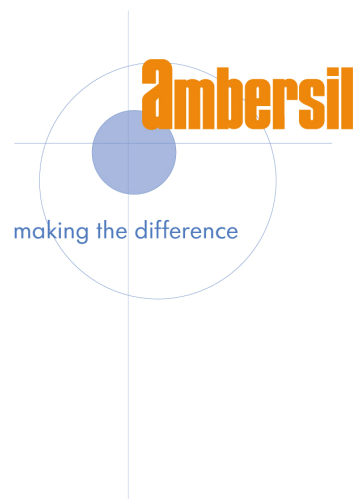

BELT DRESSING is a synthetic polymer based formulation that meets the demands for an industrial strength belt dressing. It extends the life of belts and pulley bearings by improving traction and allows running under reduced belt tension. It is suitable for all types of belts.

FEATURES

- Prevents slippage on flat, round and V-belts
- Adheres strongly to any belt material
- Gives extra pulling power, enhances transmission efficiency
- Reduces squeaking noise caused by belt slipping
- Forms a tacky, non-drying, water-resistant, chemically stable film
- Compatible with all commonly used types of belt materials (rubber, leather, fabrics, ...)
- Fitted with a 360° Spray System for all angle use, even upside down

APPLICATIONS

Eliminates slippage in flat, round or V-belts made out of rubber, leather, fabrics, plastic etc, used on:

- | | |
|------------------------|---------------|
| • Compressors | • Pumps |
| • Generators | • Fans |
| • Motors | • Automobiles |
| • Lift trucks | • Conveyors |
| • Industrial machinery | |

DIRECTIONS

- Turn off equipment and stop belts before applying.
- Spray a light, even coating on pulling sides of belt (i.e. sides that come in contact with pulleys); let solvent evaporate before re-energising equipment.
- Re-apply occasionally to ensure continued high performance.
- Remove if necessary, with Ambersil Amberklene LO30 (test compatibility with rubber and plastic prior to use).



TECHNICAL DATA

Appearance	:	Clear liquid
Specific gravity (@ 20°C)	:	0.75
Flash point (closed cup)	:	< 0°C
Specific gravity (@ 20°C)	:	0.91
Max. temp. (cont.)	:	100°C
Viscosity (@ 99°C)	:	4100 mPa.s
Average mol. Wt.	:	2300
Packaging	:	400ml

STORAGE

The product may be stored at normal ambient temperatures and has a shelf life of not less than 72 months with correct storage. Aerosols should always be stored below 50°C, away from direct heat and naked flame.

HEALTH AND SAFETY

Health and Safety sheet available separately.

MISREPRESENTATION ACT 1967

TRADE DESCRIPTIONS ACT 1968

The information given in this publication is based on our experience and reports from customers. There are many factors outside our control and knowledge which affect the use and performance of our products and for which reason no warranty is given, express or implied. Users should make their own tests to determine the applicability of such information or the suitability of any products for their own particular purposes. Statements concerning the use of the products described herein are not to be construed as recommending the infringement of any patent and no liability for infringement arising out of any such use is to be assumed.

CRC Industries UK Limited, Wylds Road, Bridgwater, Somerset, TA6 4DD

Tel: +44 (0) 1278 727200

Fax: +44 (0) 1278 425644

Web: www.ambersil.com

E-mail: sales.uk@crcind.com